

## DS-2TS03-35UF/W Handheld Observational Thermal Monocular



Hikvision DS-2TS03-35UF/W handheld observational thermal monocular is equipped with a 384 × 288 infrared detector and a 1024×768 OLED display. It supports functions of observation, hot spot tracking, distance measurement, Wi-Fi hot spot, and so on. The high-sensitivity built-in thermal detector provides you with clear view even in total darkness. The monocular is mainly applied to scenarios such as patrolling, law enforcement, searching and rescuing, drug enforcement, anti-smuggling, criminal seizing, hiking, travel, and hunting, etc.

### Key Features

- 384 × 288 resolution, high sensitivity detector
- Adaptive AGC, DDE, 3D DNR, NETD less than 35 mk (@25°C), F#=1.0
- 1024 × 768 resolution 0.39-inch OLED display
- Built-in rechargeable Li-ion battery
- Up to five hours continuous running (with Wi-Fi hot spot function off)
- Wi-Fi hot spot
- Up to 180 m laser light with the battery fully charged



## Specification

Thermal Module	
Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays
Max. Resolution	384 × 288
Response Waveband	8μm to 14μm
NETD	less than 35 mk (@25°C), F#=1.0
Lens (Focal Length)	35 mm
MRAD	0.49 mrad
Field of View	10.66° × 8° (H × V)
Digital Zoom	2×
Aperture	F1.0
Image Display	
Monitor	0.39-inch, OLED, 1024 × 768
Palettes	Black Hot White Hot Red Hot Fusion
Smart Function	
Hot Track	Yes
Wi-Fi	Yes
System	
Storage	Built-in memory module (16GB)
Record Video	On-board video recording
Capture Snapshot	Yes
Laser Light	180 m
Power Supply	
Battery Type	Lithium Battery
Battery Operating Time	Up to five hours continuous running (with Wi-Fi hot spot function off)
Battery Capacity Display	Yes
General	
Menu language	English
Power	5V DC/2A, 2W
Working Temperature	-30 °C to 55 °C (-22 °F to 131 °F)
Protection Level	IP67
Drop Test Height	2 m (6.56 feet)

## General

Dimension	189 mm × 74 mm × 66 mm (7.44" × 2.91" × 2.60")
Weight	Approx. 460 g (1.01 lb)

## Detection Range Table

\* The table is only for reference, the performance may vary from camera to camera.

### Wide Range Coverage


There is range limit for detecting, recognizing, and identifying human/vehicle targets.

Detection Range (Vehicles: 1.4×4.0m)	Detection Range (Humans: 1.8×0.5m)	Recognition Range (Vehicles: 1.4×4.0m)	Recognition Range (Humans: 1.8×0.5m)	Identification Range (Vehicles: 1.4×4.0m)	Identification Range (Humans: 1.8×0.5m)
3157 m	1029 m	789 m	257 m	395 m	129 m

## Available Model

DS-2TS03-35UF/W

## Dimension

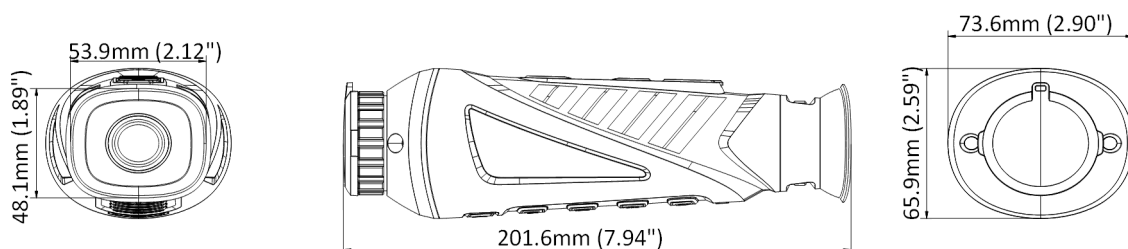

Distributed by

# SCV<sub>SA</sub>

Energiekosten sparen  
Réduire vos dépenses énergétiques

Rue de l'Hôpital 49, 3280 Meyriez/Murten (Morat)  
Tel. 026 672 90 50, Fax 026 672 90 55  
info@scv-sa.ch, www.scv-sa.ch

# HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com